



General Characteristics

DISCHARGE CHARACTERISTICS

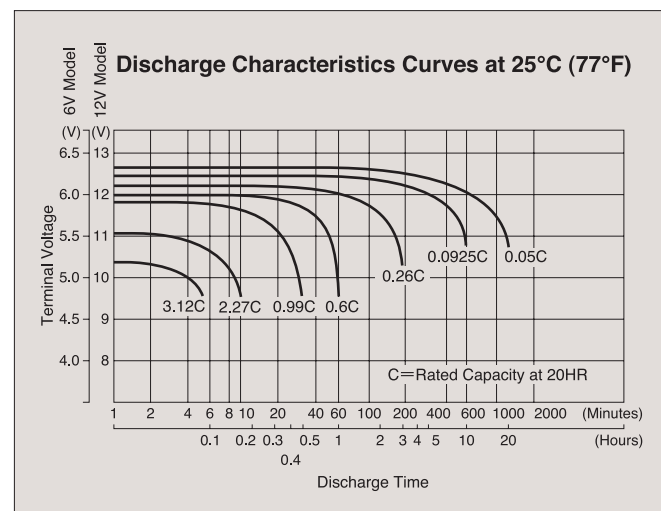

CHARGING CHARACTERISTICS

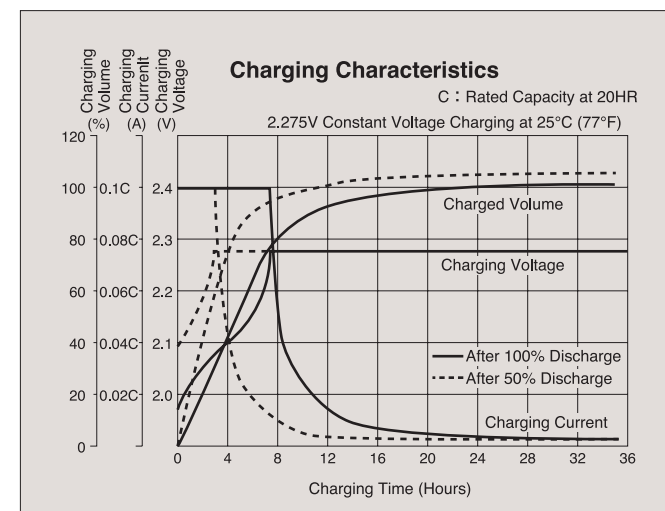

**“Yuasa” Brand Maintenance-Free
Valve Regulated Lead-Acid
Stationary Batteries**

UXH SERIES



Peripheral Device

**A life diagnosis device for valve regulated lead-acid batteries, “JUST FEEL” .
The battery monitor, JUST FEEL, diagnoses life of valve regulated lead-acid batteries.
Battery life can be diagnosed without disconnecting a power supply as a result of
measuring battery internal impedance during floating charge.**

- Diagnoses battery life during floating charge.
- A compact, portable device.
- Can be used for a large variety of valve regulated lead-acid batteries.
- Mounted with comparator function.
- May be used for UPS batteries. (Some models may prohibit the use of this device. If you intend to use the device for UPS, please contact us for consultation.)



● Specifications subject to change without prior notice

Distributed by:
GS Yuasa International Ltd.
1-8-1, Nishi-Shimbashi, Minato-ku
Tokyo 105-0003
Japan
Tel +81-3-3597-2403
Fax +81-3-3597-2405

UXH SERIES

The latest in YUASA's state-of-the-art technology has brought about a new UXH series capable of yielding even greater capacity than comparable batteries.


YUASA UXH batteries are designed with unique valve regulating devices and acid free constructions, ensuring safety and suitability to the contemporary business environment.

Designed Life

10 years

Features

- Up to 15% more capacity
- Maintenance-free
- Higher energy efficiency
- Negligible gas emissions
- Valve regulated
- Systems compatible
- Fitted with explosion proof filter (Except UXH100-12N and UXH200-6N)
- No equalizing charge required
- (Option) Flame retardant version available
- No free Acid (Non-spillable Battery)

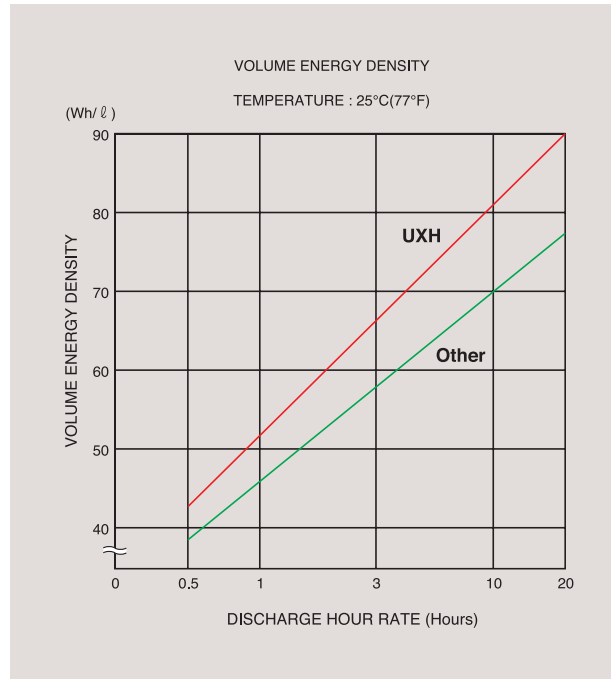

Float charge voltage: 2.275V per cell
 Permissible operating temperature: -15~45°C
 Container material: ABS
 Terminal: L terminal

Applications

- UPS
- Telecommunications
- Alarm systems
- Fire & security systems
- Emergency lighting
- Engine starting
- Solar powered systems
- Utilities
- Rail

General Specifications

Battery Model	Nominal Voltage(V)	20HR Rated Capacity(Ah) *1	Internal Resistance(mΩ) *2	Approx. Dimensions, mm(inch)				Approx. Weight kg(lbs.)	Explosion Proof Filter
				Length	Width	Height	Overall Height		
UXH38-12	12	38	7.0	235 (9.3)	128 (5.0)	190 (7.5)	217 (8.5)	17 (37)	○
UXH50-12	12	50	6.0	299 (11.8)	128 (5.0)	190 (7.5)	217 (8.5)	21 (46)	○
UXH63-12	12	63	5.0	363 (14.3)	128 (5.0)	190 (7.5)	217 (8.5)	25 (55)	○
UXH75-6	6	75	2.2	217 (8.5)	128 (5.0)	190 (7.5)	217 (8.5)	16 (35)	○
UXH100-6	6	100	1.8	281 (11.1)	128 (5.0)	190 (7.5)	217 (8.5)	20 (44)	○
UXH125-6	6	125	1.5	345 (13.6)	128 (5.0)	190 (7.5)	217 (8.5)	24 (53)	○
UXH100-12N	12	100	4.0	407 (16.0)	172.5 (6.8)	210 (8.3)	240 (9.4)	39 (86)	×
UXH200-6N	6	200	1.3	398 (15.6)	176 (6.9)	216 (8.5)	250 (9.8)	39 (86)	×

*1 Final Voltage: 1.80V/cell, Temperature: 25°C(77°F)
 *2 In a fully charged state and measured through a 1000Hz AC bridge.

Performance Data at 25°C(77°F)

(Amperes and Watts per cell)
 Amperes to F.V.1.60 Volts Per Cell

Battery Model	Time	Amperes										
		1 min	5 min	10 min	15 min	20 min	25 min	30 min	35 min	40 min	45 min	1 h
UXH38-12	A	141.0	119.0	86.3	63.5	50.9	42.6	37.6	33.4	30.8	28.0	22.8
	W	229.0	199.0	154.0	116.0	94.2	79.4	71.1	63.5	58.5	53.6	43.7
UXH50-12	A	185.0	156.0	114.0	83.5	67.0	56.0	49.5	44.0	40.5	37.0	30.0
	W	302.0	262.0	203.0	153.0	124.0	105.0	93.5	83.5	77.0	70.5	57.5
UXH63-12	A	233.0	197.0	143.0	105.0	84.4	70.6	62.4	55.4	51.0	46.6	37.8
	W	380.0	330.0	255.0	193.0	156.0	132.0	118.0	105.0	97.0	88.8	72.5
UXH75-6	A	278.0	234.0	170.0	125.0	101.0	84.0	74.3	66.0	60.8	55.5	45.0
	W	452.0	393.0	304.0	230.0	186.0	157.0	140.0	125.0	116.0	106.0	86.3
UXH100-6	A	370.0	312.0	227.0	167.0	134.0	112.0	99.0	88.0	81.0	74.0	60.0
	W	603.0	524.0	405.0	306.0	248.0	209.0	187.0	167.0	154.0	141.0	115.0
UXH125-6	A	463.0	390.0	284.0	209.0	168.0	140.0	124.0	110.0	101.0	92.5	75.0
	W	754.0	655.0	506.0	383.0	310.0	261.0	234.0	209.0	193.0	176.0	144.0
UXH100-12N	A	370.0	312.0	227.0	167.0	134.0	112.0	99.0	88.0	81.0	74.0	60.0
	W	603.0	524.0	405.0	306.0	248.0	209.0	187.0	167.0	154.0	141.0	115.0
UXH200-6	A	740.0	624.0	452.0	334.0	268.0	224.0	198.0	176.0	162.0	148.0	120.0
	W	1204.0	1048.0	808.0	612.0	496.0	416.0	374.0	334.0	308.0	282.0	230.0

Amperes to F.V.1.70 Volts Per Cell

Battery Model	Time	Amperes												
		1 min	5 min	10 min	15 min	20 min	25 min	30 min	35 min	40 min	45 min	1 h	2 h	3 h
UXH38-12	A	123.0	106.0	73.7	57.4	47.9	41.4	36.5	32.3	29.3	27.0	22.0	13.7	9.9
	W	211.0	186.0	133.0	106.0	88.9	77.9	69.2	61.6	55.9	51.7	42.6	26.6	19.4
UXH50-12	A	162.0	139.0	97.0	75.5	63.0	54.5	48.0	42.5	38.5	35.5	29.0	18.0	13.0
	W	277.0	245.0	176.0	139.0	117.0	103.0	91.0	81.0	73.5	68.0	56.0	35.0	25.5
UXH63-12	A	204.0	175.0	122.0	95.1	79.4	68.7	60.5	53.6	48.5	44.7	36.5	22.7	16.4
	W	349.0	308.0	221.0	175.0	147.0	129.0	115.0	102.0	92.6	85.7	70.6	44.1	32.1
UXH75-6	A	243.0	209.0	146.0	113.0	94.5	81.8	72.0	63.8	57.8	53.3	43.5	27.0	19.5
	W	416.0	367.0	263.0	209.0	176.0	154.0	137.0	122.0	110.0	102.0	84.0	52.5	38.3
UXH100-6	A	324.0	278.0	194.0	151.0	126.0	109.0	96.0	85.0	77.0	71.0	58.0	36.0	26.0
	W	554.0	489.0	351.0	278.0	234.0	205.0	182.0	162.0	147.0	136.0	112.0	70.0	51.0
UXH125-6	A	405.0	348.0	243.0	189.0	158.0	136.0	120.0	106.0	96.3	88.8	72.5	45.0	32.5
	W	693.0	611.0	439.0	348.0	293.0	256.0	228.0	203.0	184.0	170.0	140.0	87.5	63.8
UXH100-12N	A	324.0	278.0	194.0	151.0	126.0	109.0	96.0	85.0	77.0	71.0	58.0	36.0	26.0
	W	554.0	489.0	351.0	278.0	234.0	205.0	182.0	162.0	147.0	136.0	112.0	70.0	51.0
UXH200-6	A	648.0	556.0	388.0	302.0	252.0	218.0	192.0	170.0	154.0	142.0	116.0	72.0	52.0
	W	1106.0	976.0	700.0	556.0	468.0	408.0	364.0	324.0	294.0	272.0	224.0	140.0	102.0

Amperes to F.V.1.80 Volts Per Cell

Battery Model	Time	Amperes																
		1 min	5 min	10 min	15 min	20 min	25 min	30 min	35 min	40 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h	20 h
UXH38-12	A	99.2	86.3	63.8	52.8	44.8	38.8	35.0	31.2	28.1	26.2	21.3	12.9	9.5	6.1	4.2	3.5	1.90
	W	179.0	157.0	118.0	99.2	84.7	73.7	66.9	59.7	54.3	50.5	41.4	25.1	18.6	12.2	8.4	6.8	3.80
UXH50-12	A	131.0	114.0	84.0	69.5	59.0	51.0	46.0	41.0	37.0	34.5	28.0	17.0	12.5	8.0	5.5	4.6	2.50
	W	236.0	207.0	156.0	131.0	112.0	97.0	88.0	78.5	71.5	66.5	54.5	33.0	24.5	16.0	11.0	9.0	5.00
UXH63-12	A	164.0	143.0	106.0	87.6	74.3	64.3	58.0	51.7	46.6	43.5	35.3	21.4	15.8	10.1	6.9	5.8	3.15
	W	297.0	260.0	196.0	164.0	140.0	122.0	111.0	98.9	90.1	83.8	68.7	41.6	30.9	20.2	13.9	11.3	6.30
UXH75-6	A	196.0	170.0	126.0	104.0	88.5	76.5	69.0	61.5	55.5	51.8	42.0	25.5	18.8	12.0	8.3	6.9	3.75
	W	353.0	310.0	233.0	196.0	167.0	146.0	132.0	118.0	107.0	99.8	81.8	49.5	36.8	24.0	16.5	13.5	7.50
UXH100-6	A	261.0	227.0	168.0	139.0	118.0	102.0	92.0	82.0	74.0	69.0	56.0	34.0	25.0	16.0	11.0	9.3	5.00
	W	471.0	413.0	311.0	261.0	223.0	194.0	176.0	157.0	143.0	133.0	109.0	66.0	49.0	32.0	22.0	18.0	10.00
UXH125-6	A	326.0	284.0	210.0	174.0	148.0	128.0	115.0	103.0	92.5	86.3	70.0	42.5	31.3	20.0	13.8	11.6	6.25
	W	589.0	516.0	389.0	326.0	279.0	243.0	220.0	196.0	179.0	166.0	136.0	82.5	61.3	40.0	27.5	22.5	12.50
UXH100-12N	A	261.0	227.0	168.0	139.0	118.0	102.0	92.0	82.0	74.0	69.0	56.0	34.0	25.0	16.0	11.0	9.3	5.00
	W	471.0	413.0	311.0	261.0	223.0	194.0	176.0	157.0	143.0	133.0	109.0	66.0	49.0	32.0	22.0	18.0	10.00
UXH200-6	A	520.0	452.0	336.0	278.0	236.0	204.0	184.0	164.0	148.0	138.0	112.0	68.0	50.0	32.0	22.0	18.6	10.00
	W	940.0	824.0	620.0	520.0	444.0	388.0	352.0	314.0	286.0	266.0	218.0	132.0	98.0	64.0	44.0	36.0	20.00